GROHE PROFESSIONAL | TEMPESTA SYSTEM 250 CUBE
SHOWER SYSTEM WITH BATH THERMOSTAT FOR WALL MOUNTING

Article No: **26691001**
EAN Code: **4005176766206**
Date: **Oct 22. 2026**



PRODUCT INFORMATION


- Consisting of:
- horizontal swivable 390 mm projection shower arm
- **exposed thermostatic shower** with Aquadimmer function
- allows change between:
- head shower Tempesta 250 Cube (26 685)
- Rain spray pattern
- maximum flow rate (at 3 bar): 7.3 l/min
- head shower with white rear cover
- with ball joint, rotation angle ± 10°
- bath inlet
- separate diverter for hand shower
- hand shower Tempesta Cube 110 (27 571)
- 2 spray patterns: Rain, Jet
- maximum flow rate (at 3 bar): 5.6 l/min
- adjustable height via gliding element
- RotaflexTwistStop shower hose 1750 mm 1/2" x 1/2" (28 410)
- maximum flow rate system (at 3 bar): 7.3 l/min
- **GROHE TurboStat** - compact cartridge with wax thermoelement
- **GROHE SafeStop** - safety button at 38°C
- **GROHE SafeStop Plus** - optional temperature limiter at 43°C included
- GROHE SmartSwitch - turn the dial to change spray patterns
- **GROHE DreamSpray** - perfect spray pattern
- GROHE ShockProof - silicone ring protects shower head if dropped
- GROHE LongLife finish - a hard-wearing surface that’s easy to maintain
- GROHE SpeedClean - effortless limescale removal
- **Inner WaterGuide** - inner insulation for surface protection
- **TwistStop** - to prevent hose from twisting
- suitable for instantaneous heaters from 18 kW/h
- minimum flow rate 5 l/min.
- professional edition

© GROHE AG

GROHE PROFESSIONAL | TEMPESTA SYSTEM 250 CUBE
SHOWER SYSTEM WITH BATH THERMOSTAT FOR WALL MOUNTING


TECHNICAL DATA

Surface finish	**Polished**
Installation type	**Wall-mounted exposed**
Number of spray types	**2 sprays**
Number of sprays headshower	**1 spray**
Diameter headshower (mm)	**250X250**
Length of shower hose (mm)	**1750**
Center distance	**150 mm**
Type of (S-) unions	**With S-unions**

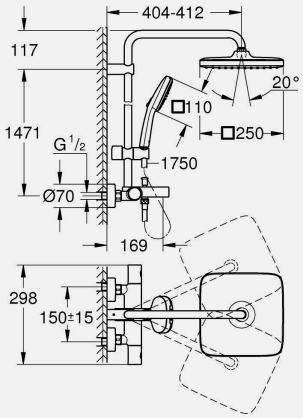


FLOW PROPERTIES

Flow rate at 3bar (l)	**7.3**
Flow rate at 3bar (l) - handshower	**5.6**
Flow rate at 3bar (l) - headshower	**7.3**

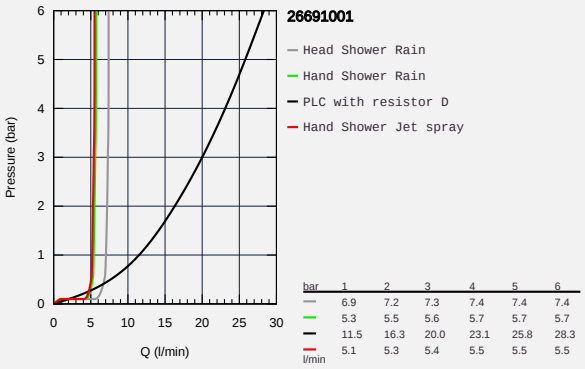

GROHE PROFESSIONAL | TEMPESTA SYSTEM 250 CUBE
SHOWER SYSTEM WITH BATH THERMOSTAT FOR WALL MOUNTING

SPARE PARTS

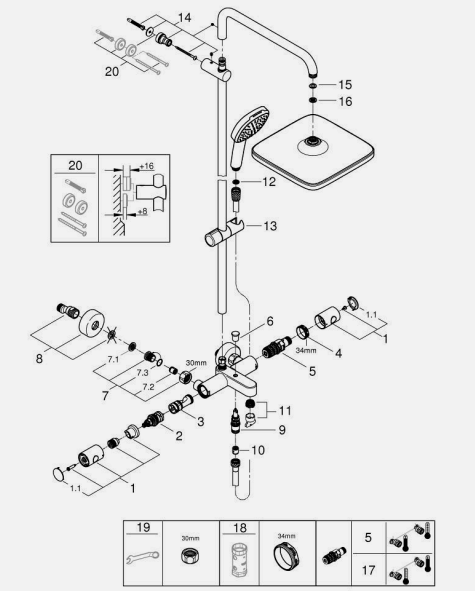

1	Metal handle 1/2" (order no. 47984000)
1.1	Cover Cap (order no. 6458500M)
2	Aquadimmer (order no. 47364000)
2.1	O-Ring (order no. 0305600M)
3	Water flow (order no. 47887000)
4	retaining ring (order no. 47743000)
5	Thermostatic compact cartridge 1/2" (order no. 47439000)
6	Diverter knob (order no. 65648000)
7	Non-return valve (order no. 47189000)
7.1	Filter (order no. 0726400M)
7.2	Non-return valve (order no. 08565000)
7.3	O-Ring Ø17 x Ø2 (order no. 0305500M)
8	S-union (order no. 12662000)
9	Diverter (order no. 65655000)
10	Non-return valve (order no. 08565000)
11	Flow restrictor (order no. 13926000)
12	Strainer (order no. 0700200M)
13	Sliding piece (order no. 48609000)
14	Outlet shower holder (order no. 48423000)
15	Fibre seal dia. Ø 18,5 x Ø 12 x 2 (order no. 0138900M)
16	Strainer (order no. 48007000)
17	GROHE TurboStat cartridge 1/2" (order no. 47175000)
18	Socket Spanner (order no. 19332000)
19	Special Spanner (order no. 19377000)
20	Spacer (order no. 26496000)